

GC Counting Indicator



As a fully featured counting indicator, the GC offers a numeric keypad for unit weight and sample entry and a large backlit display to show unit weight, total weight and number of pieces. With valuable features like check counting included, the GC offers the ability to warn the user when a pre-defined count has been reached.

A solid ABS plastic housing and wall-mounted bracket makes the GC a durable and versatile indicator. The GC can be used in remote locations without power, due to the internal rechargeable battery. It can also accumulate count totals through its memory facility.

Adam Equipment has been manufacturing balances and scales for almost 40 years, providing professionals worldwide with quality products that are always the right balance of speed, performance, and value.



BEADAM[®]
THE RIGHT BALANCE
Speed, Performance, Value

GC Indicator Highlights:

Transmit information to computers and printers with the built-in bi-directional RS-232 interface, for easy data recording and logging.

A large backlit display clearly shows unit weight, weight and pieces for quick and easy readings, making counting applications simple and trouble-free.

Colour-coded keypad makes frequently used buttons instantly recognizable for accuracy, and the smart user interface makes learning and operating the scale simple and easy-to-do.

Compact counting indicator the GC offers smart features and quick operation


Features

- Weighing
- Preset counting to a value
- Bi-directional RS-232 to print out weight, average piece weight and number of pieces counted
- Date and time
- Selectable multi-language text for printing
- Freely selectable sample size through keypad entry
- Entry for average piece weight of an item to counted
- Can be linked with 1 to 4 loadcells
- Rechargeable battery
- Backlit LCD display shows weight, average piece weight and counting
- Memory accumulation of parts counted
- Wall-mount bracket

Applications

- Weighing
- Counting
- Parts counting
- Check counting

Technical Specifications

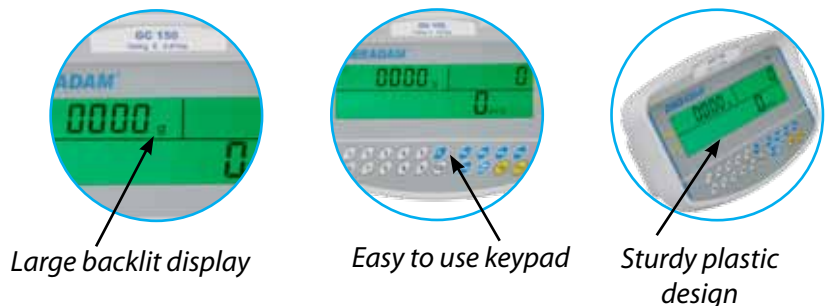

Model	GC Indicator
Capacity	Free entry up to 30,000 divisions
Readability	As required for 30,000d or less
Resolution	Up to 30,000d
Linearity (+/-)	2d
Number of Loadcells	Up to 4 loadcells
Weighing Units	Kilograms (kg), Gram (g), Pounds (lbs)
Stabilisation Time	2-3 secs
Calibration	Automatic external
Display	Large LCD backlit display
Power Supply	Internal rechargeable battery / 230VAc 50/60Hz adapter, 115v optional
Housing	ABS plastic
Overall Dimensions	252mm x 170mm x 110mm / 9.9" x 4.3" x 6.7"
Net Weight	2kg / 4.4lb